

EPDM Rubber gasket
ref. PL-03

U round handrail
d. 42,4 mm ref. RP-1400

Sealed with polymer SP-101

Glass 16,76-21,52

Wedge and rubber set
for glass ref. PL-14

Base shoe profile fascia-mount ref. SV-1404

Screed 30,0 N/mm²

Finished floor

FFL

Max. 1100

Max. 70

Min. 80

107

229

A

64

Anchor bolts FBN II M12
L116 or similar

Uncracked concrete C25/30

Sheet cladding ref. PM-57

Detail A. Drainage
Scale 1:4

KEY:

	Stainless steel
	Glass
	Aluminium
	Nylon Polyamide
	PVC
	EPDM
	Concrete
	Mortar
	Finished floor

Note:
PL-14 is a set of spacers,
wedges and gaskets.

Finished floor level

All dimensions are showed in millimeters (mm)

Due to the broad diversity of materials existing on the market and the different application methods outside of our control, we recommend in any case to do physical tests and sufficient controls to ensure the suitability of the product in each specific application.
It is the responsibility of the user to establish the suitability of the information provided with their particular use of the product.

It is prohibited to make total or partial reproductions, as well as copies, without the written authorisation of Comenza.
COPYRIGHT: COMENZA SL (2016)

Scale:	1:2	Format:	UNE A-3
Author:	Technical office		
Date:	01/09/2016		
Customer:	N/A		
Project:	N/A		

System	GlassFit SV-1404 Side Y
Model:	COMENZA_GlassFit SV-1404 Side Y_PM-57_U round handrail RP-1400_R70_M
Plan:	General details



Nº Plan
1 / 1

EPDM Rubber gasket
ref. PL-03

U round handrail
d. 42,4 mm ref. RP-1400

Sealed with polymer SP-101

Glass 16,76-21,52

Wedge and rubber set
for glass ref. PL-34

Sheet cladding ref. PM-58

Double sided tape ref. RP-62

Base shoe profile fascia-mount ref. SV-1404

Screed 30,0 N/mm²

Finished floor

FFL

Max. 1100

Max. 70

Min. 80

107











232

±10


Anchor bolts FBN II M12
L116 or similar


Uncracked concrete C25/30

KEY:

-  Stainless steel
-  Glass
-  Aluminium
-  Nylon Polyamide
-  PVC
-  EPDM
-  Double sided tape
-  Concrete
-  Mortar
-  Finished floor

Note:
PL-14 is a set of spacers,
wedges and gaskets.

 Finished floor level

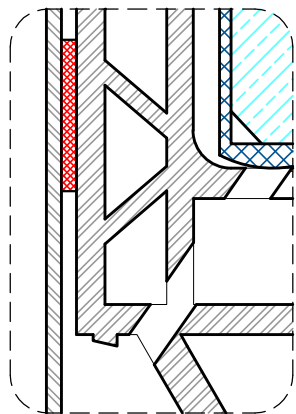

Detail A. Drainage
Scale 1:4

66

All dimensions are showed in millimeters (mm)

Due to the broad diversity of materials existing on the market and the different application methods outside of our control, we recommend in any case to do physical tests and sufficient controls to ensure the suitability of the product in each specific application.
It is the responsibility of the user to establish the suitability of the information provided with their particular use of the product.

It is prohibited to make total or partial reproductions, as well as copies, without the written authorisation of Comenza.
COPYRIGHT: COMENZA SL (2016)

Scale:	1:2	Format:	UNE A-3
Author:	Technical office		
Date:	01/09/2016		
Customer:	N/A		
Project:	N/A		

System	GlassFit SV-1404 Side Y
Model:	COMENZA_GlassFit SV-1404 Side Y_PM-58_U round handrail RP-1400_R70_M
Plan:	General details


comenza
Railing Passion

Nº Plan
1 / 1