


DIN 6912

Hexagon socket head cap screws

with low head and pilot recess

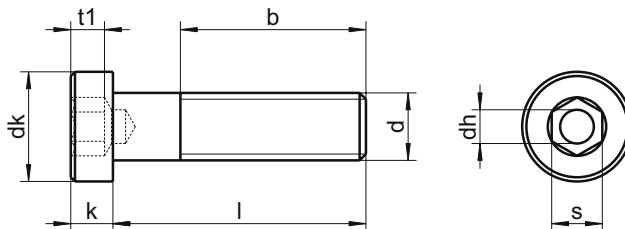

	5,5	7,0	8,5	10,0	13,0	16,0	18,0	21,0	24,0	27	30,0	36,0
dk	2,0	2,8	3,5	4,0	5,0	6,5	7,5	8,5	10,0	11,0	12,0	14,0
k	2	3	4	5	6	8	10	12	14	14	17	19
s	1,2	1,6	2,0	2,5	3,0	3,5	4,0	4,5	5,5	6,0	6,5	7,0
t1	1,5	2,0	2,5	3,0	4,0	5,0	6,0	7,0	8,0	8,0	10,0	12,0
dh	12	14	16	18	22	26	30	34	38	42	46	54
b	2	3	4	5	6	8	10	12	14	14	17	19
●												
Length / Ø	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M24
6	▲●	▲●	▲●									
8	▲●	▲●	▲●	▲●								
10	▲●	▲●	▲●	▲●	▲●							
12	▲●	▲●	▲●	▲●	▲●	▲●						
14	▲●	▲●	▲●	▲●	▲●							
16	▲●	▲●	▲●	▲●	▲●	▲●	▲●					
18	▲●	▲●	▲●	▲●	▲●	▲●	▲●					
20	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●			
22	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●			
25	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●			
30	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
35		▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
40		▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
45			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
50			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
55			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
60			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
65			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
70			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
80				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
90					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
100					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
110						▲●	▲●	▲●	▲●	▲●	▲●	▲●
120							▲●	▲●	▲●	▲●	▲●	▲●
130								▲●	▲●	▲●	▲●	▲●
140								▲●	▲●	▲●	▲●	▲●
150								▲●	▲●	▲●	▲●	▲●
SU	500	500 ≥ 35 200	500 ≥ 25 200	500 ≥ 14 200 ≥ 45 100	200 ≥ 60 100 ≥ 100 50	100 ≥ 60 50	50 ≥ 80 25	25	25	25	25	20

■ A1 / ▲ A2 / ● A4 | SU: Sales unit | All measurements in mm | Other dimensions on request.

Example item no. 6912-2-8X40 DIN 6912 - A2 - M8 - l = 40mm