



sim. ISO 2010 - **DIN 964**
Slotted raised countersunk head screws

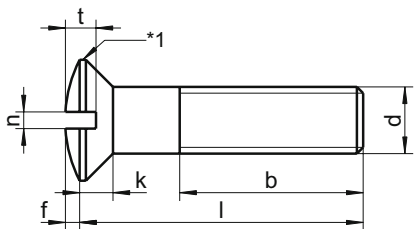

	3,8	4,7	5,6	7,5	9,2	11,0	14,5	18,0
dk	0,50	0,60	0,75	1,00	1,25	1,50	2,00	2,50
f	1,20	1,50	1,65	2,20	2,50	3,00	4,00	5,00
k	0,5	0,6	0,8	1,0	1,2	1,6	2,0	2,5
n	0,8	1,0	1,2	1,6	2,0	2,4	3,2	4,0
t min.	16	18	19	22	25	28	34	40
b min.	0,5X3,0	0,6X3,5	0,8X4,0	1,0X5,5	1,2X7,0	1,6X9,0	2,0X12,0	2,5X14,0
Length / Ø	M2	M2,5	M3	M4	M5	M6	M8	M10
4	▲●							
5	▲●							
6	▲●	▲●						
8	▲●	▲●	▲●	▲●	▲●			
10	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
12	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
14	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
16	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
18	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
20	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
22			▲●	▲●	▲●	▲●	▲●	▲●
25			▲●	▲●	▲●	▲●	▲●	▲●
30			▲●	▲●	▲●	▲●	▲●	▲●
35			▲●	▲●	▲●	▲●	▲●	▲●
40			▲●	▲●	▲●	▲●	▲●	▲●
45			▲●	▲●	▲●	▲●	▲●	▲●
50			▲●	▲●	▲●	▲●	▲●	▲●
55				▲●	▲●	▲●	▲●	▲●
60				▲●	▲●	▲●	▲●	▲●
65				▲●	▲●	▲●	▲●	▲●
70				▲●	▲●	▲●	▲●	▲●
75				▲●	▲●	▲●	▲●	▲●
80				▲●	▲●	▲●	▲●	▲●
90					▲●	▲●	▲●	▲●
95					▲●	▲●	▲●	▲●
100					▲●	▲●	▲●	▲●
SU	1000	1000	500	500 ≥ 70 200	500 ≥ 25 200	P100	100	100

■ A1 / ▲ A2 / ● A4 | SU: Sales unit | All measurements in mm | Other dimensions on request.

Example item no. 964-2-8X40 DIN 964 - A2 - M8 - l = 40mm - *1 head with rounded or flatended edge