



# sim. ISO 7046 - **DIN 965 Z** Countersunk flat head screws with cross recess Z (Pozidrive)

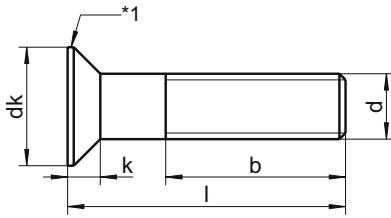

dk	3,0	3,8	4,7	5,6	7,5	9,2	11,0	14,5	18,0
k	0,96	1,20	1,50	1,65	2,20	2,50	3,00	4,00	5,00
b min.	15	16	18	19	22	25	28	34	40
⊕	Z0	Z1	Z1	Z1	Z2	Z2	Z3	Z4	Z4
Length / Ø	M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10
3	▲●	▲●							
4	▲●	▲●	▲●	▲●					
5	▲●	▲●	▲●	▲●	▲●				
6	▲●	▲●	▲●	▲●	▲●	▲●			
8	▲●	▲●	▲●	▲●	▲●	▲●	▲●		
10	▲●	▲●	▲●	▲●	▲●	▲●	▲●		
12	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
14	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
16	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
18		▲●	▲●	▲●	▲●	▲●	▲●	▲●	
20		▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
22			▲●	▲●	▲●	▲●	▲●	▲●	▲●
25			▲●	▲●	▲●	▲●	▲●	▲●	▲●
30				▲●	▲●	▲●	▲●	▲●	▲●
35				▲●	▲●	▲●	▲●	▲●	▲●
40				▲●	▲●	▲●	▲●	▲●	▲●
45				▲●	▲●	▲●	▲●	▲●	▲●
50				▲●	▲●	▲●	▲●	▲●	▲●
55				▲●	▲●	▲●	▲●	▲●	▲●
60				▲●	▲●	▲●	▲●	▲●	▲●
65					▲●	▲●	▲●	▲●	▲●
70					▲●	▲●	▲●	▲●	▲●
75					▲●	▲●	▲●	▲●	▲●
80					▲●	▲●	▲●	▲●	▲●
85					▲●	▲●	▲●	▲●	▲●
90					▲●	▲●	▲●	▲●	▲●
95					▲●	▲●	▲●	▲●	▲●
100					▲●	▲●	▲●	▲●	▲●
SU	1000	1000	1000	1000	1000 ≥ 25 500 ≥ 70 200	500 ≥ 25 200	200 ≥ 35 100	100	100 ≥ 70 50

■ A1 / ▲ A2 / ● A4 | SU: Sales unit | All measurements in mm | Other dimensions on request.

Example item no. 965-2-8X40Z DIN 965 - A2 - M8 - l = 40mm - pozidrive - \*1 head with rounded or flatended edge

Countersunk flat head screws with cross recess DIN 965 are also available on request as micro-screws. Slotted countersunk flat head screws can be found as DIN 963, with hexagon socket head as DIN 7991, with TX as WS 9470 and WS 9475 and as security screws with TX+PIN as WS 9482 in this catalogue.