
## WS 9479 - Ähnl. DIN 7983 Linsensenk-Blechschrauben

mit TX-Antrieb

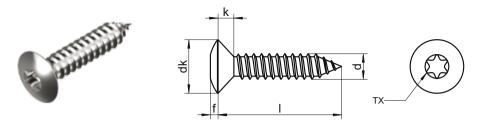

dk max.	6,8 2,1	7,5 2,3	8,1 2,5	9,5 3,0	10,8	12,4 3,8
k max.	2,1	2,3	2,5	3,0	3,4	3,8
*	1,2 TX 15	1,3 TX 15	1,4 TX 20	1,5 TX 20	1,7 TX 25	2,0 TX 30
Länge / Ø	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
13 (1/2")	<b>A</b> •					
16 (5/8")	<b>A</b> •					
19 (3/4")	<b>A</b> •					
22 (7/8")	<b>A</b> •					
25 (1")	<b>A</b> •					
32 (1 1/4")	<b>A</b> •					
38 (1 1/2")	<b>A</b> •					
45 (1 3/4")		<b>A</b> •				
50 (2")		<b>A</b> •				
60 (2 3/8")			<b>A</b> •	<b>A</b> •	<b>A</b> •	<b>A</b> •
	1000	1000	1000	500	200	200
SU	≥ 32	≥ 32	≥ 32	≥ 32	≥ 32	≥ 32
	500	500	500	200	100	100

■ A1 / ▲ A2 / ● A4 | VE: Verkaufseinheit | Alle Maße in mm / Zoll | Weitere Abmessungen auf Anfrage Beispiel Art.-Nr.: 9479-2-4,2X38 WS 9479 - A2 - Ø 4,2mm - I = 38mm